


SLL50



Lyddæmper med isoleringstykkelse på 50mm. (Type: RS Silencer)

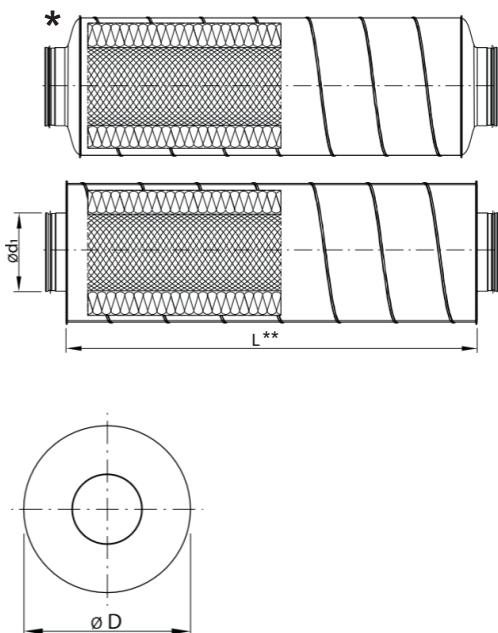

Ordreeksempel

SLL50	50	125	600
Produkt			
Isoleringstykkelse			
Dimension Ød1			
Længde, nominal			

packing thickness 50 mm

Octave band (Hz)													Mean pressure loss coefficient
Ød1	ØD _{nom}	ØD	L	63	125	250	500	1000	2000	4000	8000	Weight	
(mm)	(mm)	(mm)	(mm)	Attenuation (dB)								(kg) ~	(ζ / m)
80	180	190	300	4	6	5	13	15	16	12	15	1,7	0,374
80	180	190	600	4	9	13	26	30	32	25	24	2,9	
80	180	190	900	4	11	22	39	45	48	37	33	4,1	
80	180	190	1200	4	13	31	50	50	50	50	42	5,2	
100*	200	210	300**	3	8	7	10	25	37	36	12	2,0	0,286
100*	200	210	600	4	9	11	19	33	45	40	19	3,3	
100*	200	210	900	4	10	15	28	40	50	44	27	4,6	
100*	200	210	1200	4	10	20	37	48	50	48	34	5,9	
125*	224	234	300**	3	4	7	11	15	14	16	11	2,3	0,220
125*	224	234	600	4	6	10	19	28	33	25	18	3,8	
125*	224	234	900	4	9	14	27	42	50	35	24	5,3	
125*	224	234	1200	4	11	17	36	46	50	46	31	6,8	
140	250	260	300	3	4	7	11	16	14	15	10	2,7	0,201
140	250	260	600	4	7	9	18	34	32	24	16	4,5	
140	250	260	900	4	9	12	26	41	48	34	21	6,2	
140	250	260	1200	5	11	20	44	50	50	50	27	8,0	
150	250	260	300	2	3	6	11	16	14	15	9	2,7	0,176
150	250	260	600	3	6	9	17	30	29	24	13	4,5	
150	250	260	900	4	7	12	25	38	44	32	17	6,2	
150	250	260	1200	5	9	18	37	47	50	44	21	8,0	
160*	250	260	300**	1	2	5	11	15	14	14	8	2,7	0,163
160*	250	260	600	2	5	8	16	26	26	23	10	4,5	
160*	250	260	900	3	5	11	23	35	39	30	12	6,2	
160*	250	260	1200	4	6	15	30	44	50	38	14	7,9	
180	280	290	300	1	2	5	11	13	12	12	8	3,1	0,140
180	280	290	600	1	4	8	16	24	23	18	10	5,1	
180	280	290	900	3	5	11	21	33	35	23	12	7,1	
180	280	290	1200	3	6	14	26	43	46	29	14	9,0	
200*	300	310	300**	0	2	5	12	11	10	10	8	3,4	0,123
200*	300	310	600	0	3	7	16	22	20	13	10	5,5	
200*	300	310	900	2	5	10	19	30	31	16	11	7,6	
200*	300	310	1200	2	6	12	22	42	41	20	13	9,8	
224	315	325	300	1	2	4	10	11	10	7	6	3,8	0,108
224	315	325	600	1	3	7	15	21	18	11	8	6,4	
224	315	325	900	2	4	10	18	28	26	15	10	8,9	
224	315	325	1200	2	5	12	22	38	34	19	12	11,4	
250	355	365	300	1	1	3	8	10	9	4	4	4,8	0,095
250	355	365	600	1	2	6	13	19	15	8	6	7,7	
250	355	365	900	2	3	9	17	26	21	13	8	10,6	
250	355	365	1200	2	4	12	21	34	27	17	10	13,5	
280	400	410	300	1	1	3	7	9	7	3	3	5,5	0,081
280	400	410	600	1	2	6	12	18	14	8	5	8,9	
280	400	410	900	2	3	9	16	25	20	12	7	12,2	
280	400	410	1200	2	4	12	21	41	26	16	10	15,6	
300	400	410	300	0	2	2	5	6	3	2	2	5,4	0,074
300	400	410	600	0	2	4	7	12	8	5	4	8,7	
300	400	410	900	2	4	5	10	18	14	9	6	12,0	
300	400	410	1200	2	5	7	14	26	19	13	9	15,3	
315	400	410	300	0	1	1	5	5	1	1	1	5,9	0,069
315	400	410	600	0	1	3	6	9	6	4	4	9,2	
315	400	410	900	1	3	4	10	16	12	7	6	12,6	
315	400	410	1200	1	4	5	14	21	17	11	9	16,5	
355	455	465	600	1	1	3	6	9	5	2	3	10,8	0,061
355	455	465	900	1	3	4	9	14	9	5	4	14,7	
355	455	465	1200	1	3	5	12	18	13	7	6	18,5	
400	505	515	600	1	1	3	6	9	4	1	2	12,2	
400	505	515	900	1	3	4	8	12	6	3	2	16,5	0,052
400	505	515	1200	1	3	5	10	16	9	4	3	20,8	
450	565	575	600	1	1	3	6	8	3	2	2	13,9	
450	565	575	900	1	2	3	8	11	4	3	2	18,8	
450	565	575	1200	2	3	5	10	15	6	4	3	23,8	0,048
500	605	615	600	1	1	2	5	7	2	2	1	14,8	
500	605	615	900	2	2	3	8	11	2	3	2	20,1	
500	605	615	1200	2	3	4	10	14	3	4	3	25,3	

* with pressed end caps; only for galvanized version

** Effective installation length 350mm